

ANGLE	± 5°	REV	LOCAS	DESCRIPTION	DESIGN	DATE	卫国峰
X.XXX	± 0.05	01			DRAWN	DATE	尚伟
X.XX	± 0.15	02			CHECKED	DATE	吴汉学
X.X	± 0.25	03			AUDITED	DATE	龚劲松
X	± 0.50	04			APPROVED	DATE	eric


Specifications/备注 (Remark)

- 1-材料 (MATERIAL)
 胶芯: PBT UL94V-0
 Housing: PBT UL94V-0
 端子: 磷青铜
 Contact: Phosphor bronze
- 2-特性 (characteristics):
 额定电流: 5 AMP.
 Raring Current: 5 AMP.
 接触阻抗: ≤30mΩ MAX.
 Contact Resistance: ≤30mΩ MAX.
 绝缘阻抗: ≥1000MΩMIN.
 Insulating Resistance: ≥1000MΩMIN.
 耐电压: 1000V AC/MINUTE
 Withstanding Voltage: 1000V AC/MINUTE
 温度范围: -55度至+105度
 Temperature Range: -55°C to +105°C

ORDERING INFORMATION

DS - 3 F R B0 A X A

D-SUB	INSULATOR MATERIAL	
NO.OF PER ROW	A:PBT	
2=DUAL ROW	B:PA6T	
3=THREE ROW	CONTACTL:PA9T	COLOUR
TERMINAL	SHAPE	B:BLACK
M:MALE	S:STRAIGHT	L:BLUE
F:FEMALE	R:RIGHT ANGLE	D:WELDING LINE
CONTACT PLATING		PACKING
FULL OF GOLD SEMI-GOLD	A0=0.8u"	A:PE Bag
.....	B0=0.8u"	B:TUBE
A9=30u"	B9=30U"	C:TRAY

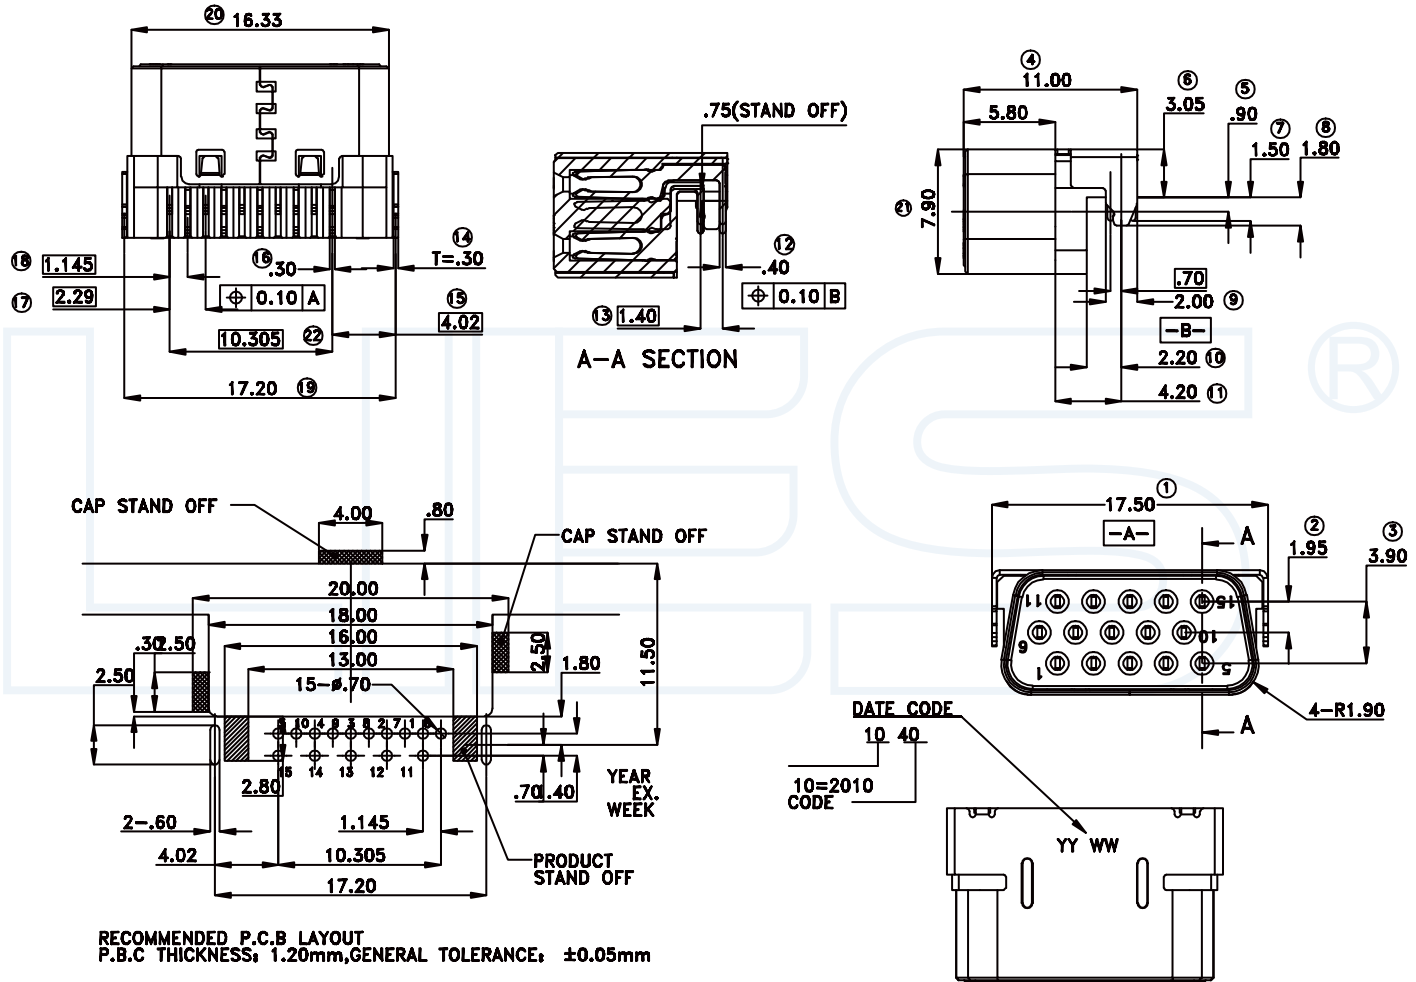

RECOMMENDED P.C.B LAYOUT
 P.B.C THICKNESS: 1.20mm, GENERAL TOLERANCE: ±0.05mm

YLIES 东莞市瑞翔精密连接器有限公司
 DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD

Tel:0769-85381995 / Fax:0769-85493987 / Email: ylies@ylies.cn / Web:www.ylies.cn


TITLE

483-D-SUB 母头插座 三排90度板下型

DATE

2018-02-18

PROJECTON



REV

A

UNIT

mm

SCALE

1:1

PAGE

1/1

PART NO:

DS-3FRB0AXA

DRAWING NO: