

ANGLE	± 5°	REV	LOCAS	DESCRIPTION	DESIGN	DATE	卫国峰
X.XXX	± 0.05	01			DRAWN	DATE	尚伟
X.XX	± 0.15	02			CHECKED	DATE	吴汉学
X.X	± 0.25	03			AUDITED	DATE	龚劲松
X	± 0.50	04			APPROVED	DATE	eric


Specifications/备注 (Remark)

- 1-材料 (MATERIAL)
 胶芯: PBT UL94V-0
 Housing: PBT UL94V-0
 端子: 磷青铜
 Contact: Phosphor bronze
- 2-特性 (characteristics):
 额定电流: 5 AMP.
 Raring Current: 5 AMP.
 接触阻抗: ≤30mΩ MAX.
 Contact Resistance: ≤30mΩ MAX.
 绝缘阻抗: ≥1000MΩMIN.
 Insulating Resistance: ≥1000MΩMIN.
 耐电压: 1000V AC/MINUTE
 Withstanding Voltage: 1000V AC/MINUTE
 温度范围: -55度至+105度
 Temperature Range: -55°C to +105°C

ORDERING INFORMATION

DS - 2 M R B0 A X A

D-SUB	INSULATOR MATERIAL
NO. OF PER ROW	A: PBT
2=DUAL ROW	B: PA6T
3=THREE ROW	CONTACT CLC: PA9T COLOUR
TERMINAL	SHAPE
M: MALE	S: STRAIGHT
F: FEMALE	R: RIGHT ANGLE
	D: WELDING LINE
CONTACT PLATING	PACKING
FULL OF GOLD SEMI-GOLD	A: PE Bag
A0=0.8u" B0=0.8u"	B: TUBE
.....	C: TRAY
A9=30u" B9=30u"	

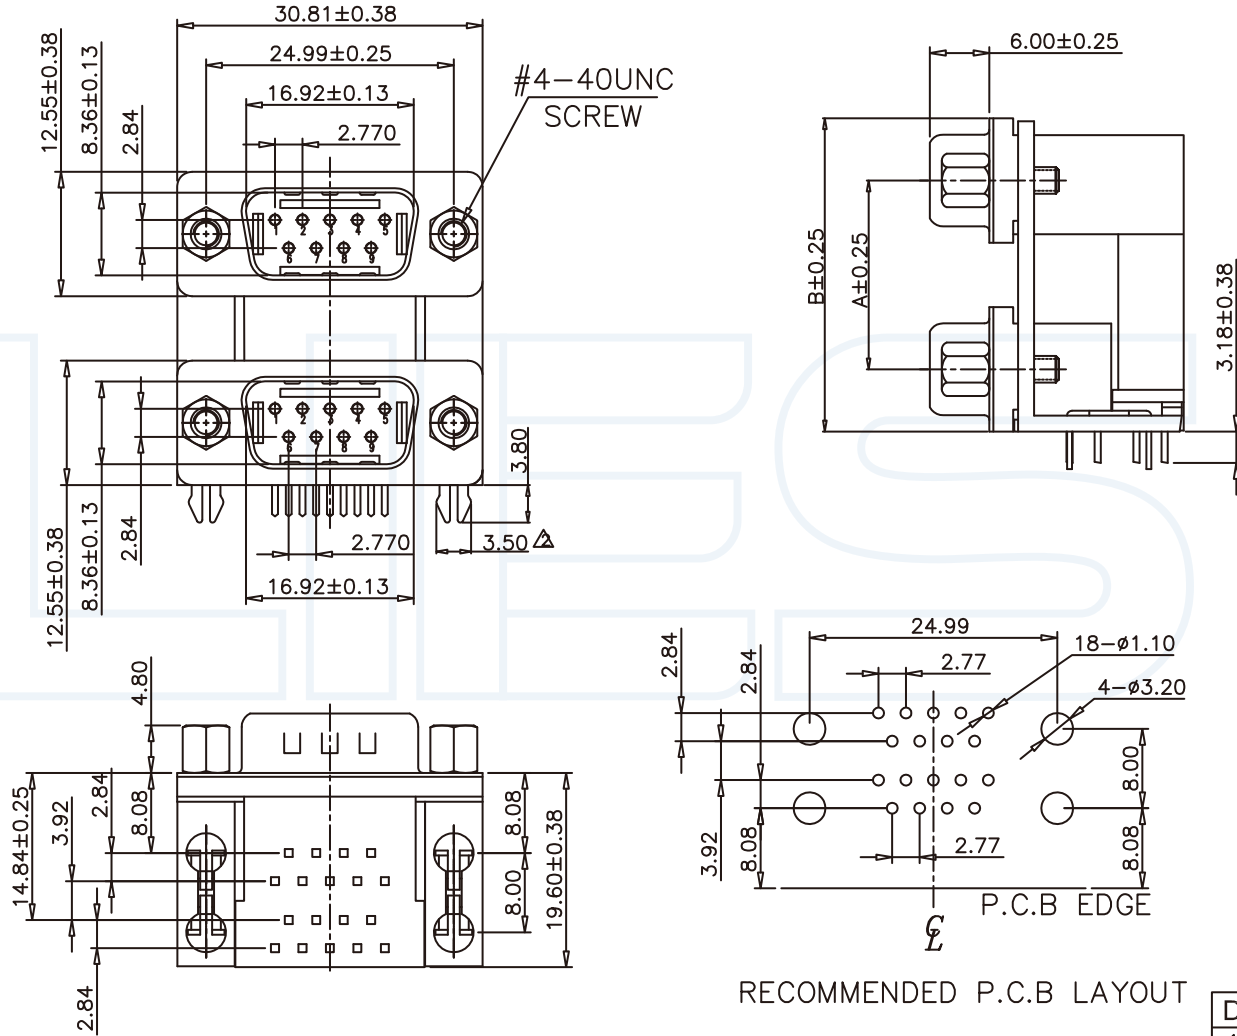

DIM A	DIM B
15.88	28.43
19.05	31.60

YLIES 东莞市瑞翔精密连接器有限公司
 DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD

TITLE 485-D-SUB 公对公 柳事双爪鱼叉 (8.08X8.0) 锁4.8头螺丝

DATE 2018-02-18

Tel:0769-85381995 / Fax:0769-85493987 / Email: ylies@ylies.cn / Web:www.ylies.cn

PROJECTON	REV	UNIT	SCALE	PAGE	PART NO:	DRAWING NO:
	A	mm	1:1	1/1	DS-2MRB0AXA	