

ANGLE	± 5°	REV	LOCAS	DESCRIPTION	DESIGN	DATE	卫国峰
X.XXX	± 0.05	01			DRAWN	DATE	尚伟
X.XX	± 0.15	02			CHECKED	DATE	吴汉学
X.X	± 0.25	03			AUDITED	DATE	龚劲松
X	± 0.50	04			APPROVED	DATE	eric

**Specifications/备注 (Remark)**


1-材料 (MATERIAL)  
 胶芯: LCP UL94V-0  
 Housing: LCP UL94V-0  
 端子: 磷青铜  
 Contact: Phosphor bronze

2-特性 (characteristics):  
 额定电流: 0.5 AMP.  
 Raring Current: 0.5 AMP.  
 接触阻抗: ≤30mΩ MAX.  
 Contact Resistance: ≤30mΩ MAX.  
 绝缘阻抗: ≥100MΩMIN.  
 Insulating Resistance: ≥100MΩMIN.  
 耐电压: 500V AC/MINUTE  
 Withstanding Voltage: 500V AC/MINUTE  
 温度范围: -55度至+105度  
 Temperature Range: -20°Cto +85°C

**ORDERING INFORMATION**

**HD - 2 F M B0 A X A**

HDMI	INSULATOR MATERIAL	COLOUR
NO.OF PER ROW	A:PBT	B:BLACK
1=ONE ROW	B:PA6T	L:BLUE
2=DUAL ROW	CONTACT: LCP	SHAPE
TERMINAL	S:STRAIGHT	R:RIGHT ANGLE
M:MALE	J:PLYWOOD	
F:FEMALE		
CONTACT PLATING	PACKING	
FULL OF GOLD SEMI-GOLD	A:PE Bag	
A0=0.8u"	B:TUBE	
B0=0.8u"	C:TRAY	
A9=30u"	D:BOX	
B9=30u"		

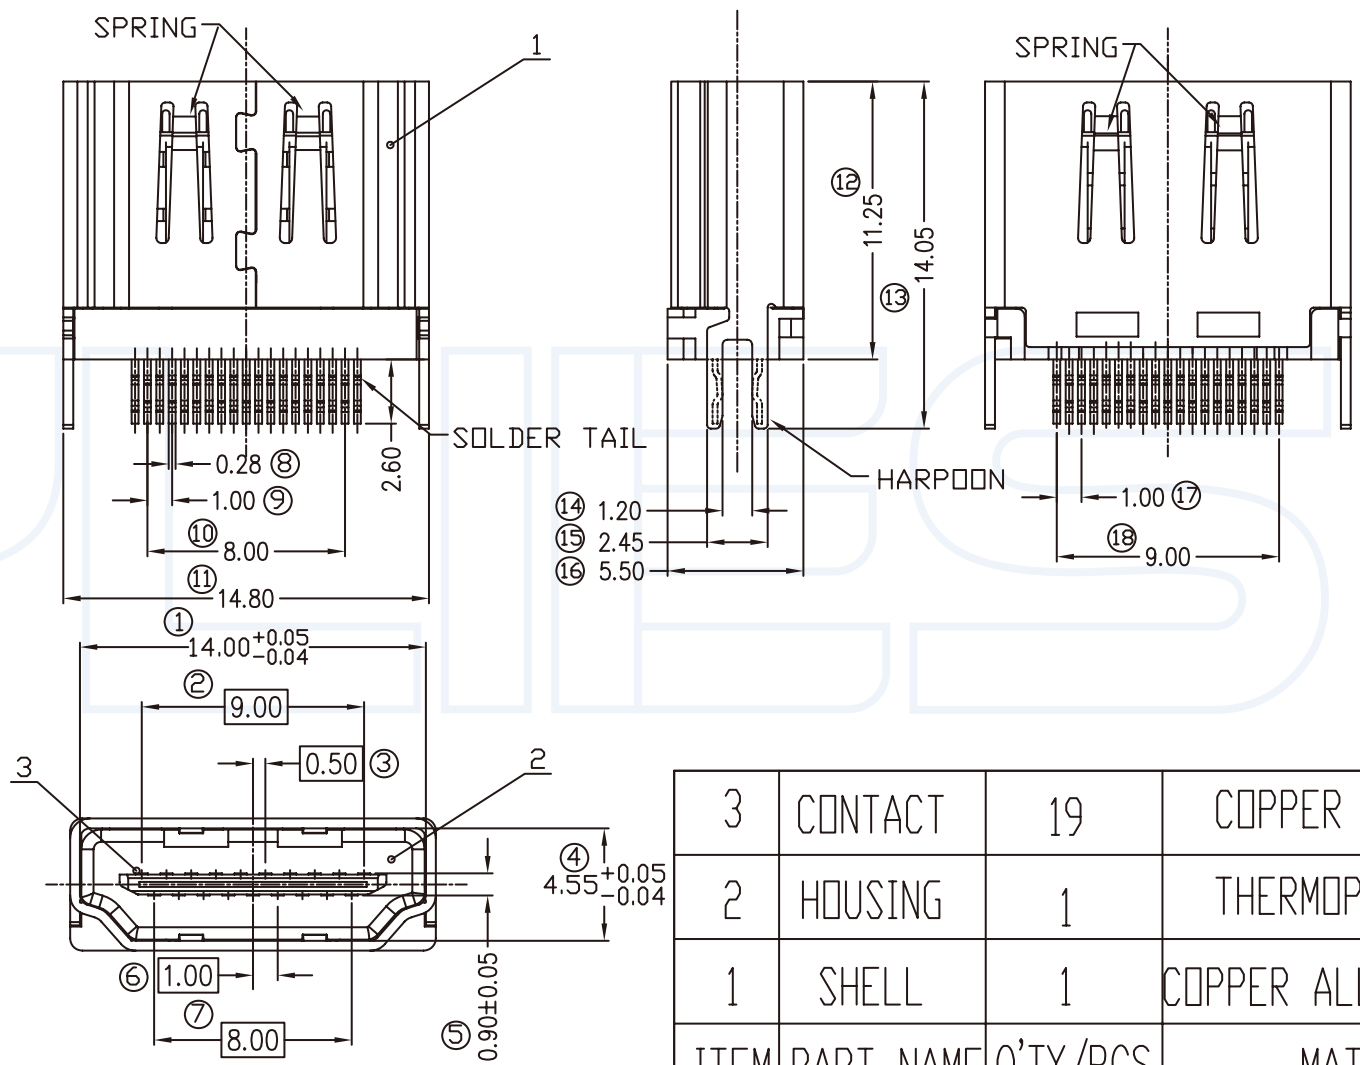

3	CONTACT	19	COPPER ALLOY
2	HOUSING	1	THERMOPLASTIC
1	SHELL	1	COPPER ALLOY & SPCC
ITEM	PART NAME	Q'TY/PCS	MATETIALS

**YLIES** 东莞市瑞翔精密连接器有限公司  
 DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD

**TITLE** 495-HDMI 母座 夹板式1.2mm **DATE** 2018-02-18

Tel:0769-85381995 / Fax:0769-85493987 / Email: ylies@ylies.cn / Web:www.ylies.cn

PROJECTON REV A UNIT mm SCALE 1:1 PAGE 1/1

**PART NO:** HD-2FJB0EBD **DRAWING NO:**