

ANGLE	± 5°	REV	LOCAS	DESCRIPTION	DESIGN	DATE	卫国峰
X.XXX	± 0.05	01			DRAWN	DATE	尚伟
X.XX	± 0.15	02			CHECKED	DATE	吴汉学
X.X	± 0.25	03			AUDITED	DATE	龚劲松
X	± 0.50	04			APPROVED	DATE	eric

**Specifications/备注 (Remark)**

**1-材料 (MATERIAL)**

胶芯: PBT UL94V-0  
Housing: PBT UL94V-0

端子: 铜合金  
Contact: Copper Alloy  
铁壳: Shell: SPCC


**2-特性 (characteristics):**

额定电流: 1.5 AMP.  
Raring Current: 1.5 AMP.  
接触阻抗: ≤30mΩ MAX.  
Contact Resistance: ≤30mΩ MAX.  
绝缘阻抗: ≥1000MΩMIN.  
Insulating Resistance: ≥1000MΩMIN.  
耐电压: 500V AC/MINUTE  
Withstanding Voltage: 500V AC/MINUTE  
温度范围: -55度至+85度  
Temperture Range: -55°Cto +85°C

**ORDERING INFORMATION**

**U - 2 F S B 0 A L D**

NO.OF PER ROW	CONTACT: LCP	INSULATOR MATERIAL
1=ONE ROW	SHAPE	A: PBT
2=DUAL ROW	S: STRAIGHT	B: PA6T
TERMINAL	R: RIGHT ANGLE	COLOUR
M: MALE	H: VERTICAL SIDE	B: BLACK
F: FEMALE		L: BLUE
CONTACT PLATING		PACKING
FULL OF GOLD SEMI-GOLD		A: PE Bag
A0=0.8u"	B0=0.8U"	B: TUBE
.....	.....	C: TRAY
A9=30u"	B9=30U"	D: BOX

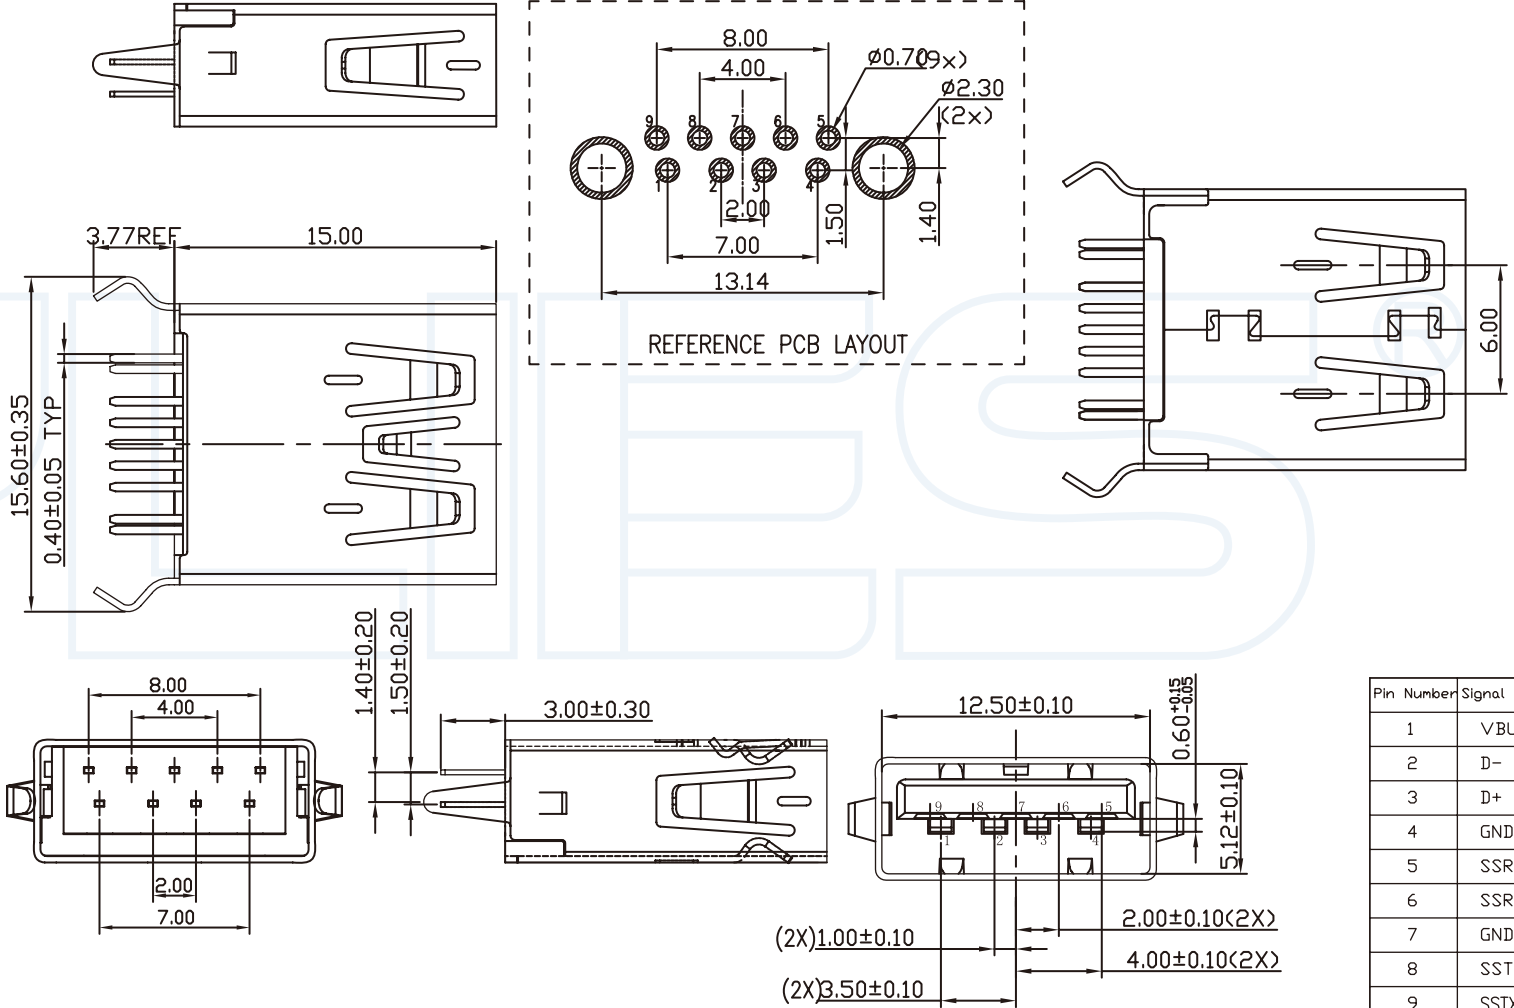

Pin Number	Signal Name
1	VBUS
2	D-
3	D+
4	GND
5	SSRX-
6	SSRX+
7	GND
8	SSTX-
9	SSTX+
Shell	Shield

**YLIES** 东莞市瑞翔精密连接器有限公司  
DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD

Tel:0769-85381995 / Fax:0769-85493987 / Email: ylies@ylies.cn / Web:www.ylies.cn

TITLE: 504-USB 3.0母座180度 DATE: 2018-02-18

PROJECTON: [Symbol] REV: A UNIT: mm SCALE: 1:1 PAGE: 1/1 PART NO: U-2FSB0ALD DRAWING NO: