

ANGLE	± 5°	REV	LOCAS	DESCRIPTION	DESIGN	DATE	卫国峰
X.XXX	± 0.05	01			DRAWN	DATE	尚伟
X.XX	± 0.15	02			CHECKED	DATE	吴汉学
X.X	± 0.25	03			AUDITED	DATE	龚劲松
X	± 0.50	04			APPROVED	DATE	eric

### Specifications/备注 (Remark)

#### 1-材料 (MATERIAL)

胶芯: LCP UL94V-0

Housing:LCP UL94V-0

端子: 黄铜

Contact: Copper Alloy C2680

铁壳: Shell: SUS304

#### 2-特性 (characteristics):

额定电流: 1.0 AMP.

Raring Current:1.0 AMP .

接触阻抗: ≤30mΩ MAX.

Contact Resistance:≤30mΩ MAX.

绝缘阻抗: ≥100MΩMIN.

Insulating Resistance:≥1-00MΩMIN.

耐电压: 300V AC/MINUTE

Withstanding Voltage:300V AC/MINUTE


温度范围: -30度至+80度

Temperature Range: -30°Cto +80°C

### ORDERING INFORMATION

#### U - 2 F M B0 E X D

USB	INSULATOR MATERIAL	
NO.OF PER ROW	A:PBT	COLOUR
1=ONE ROW	B:PA6T	B:BLACK
2=DUAL ROW		L:BLUE
TERMINAL	CONTACTE:LCP	PACKING
M:MALE	S:STRAIGHT	A:PE Bag
F:FEMALE	R:RIGHT ANGLE	B:TUBE
	H:VERTICAL SIDE	C:TRAY
		D:BOX
CONTACT PLATING		
FULL OF GOLD SEMI-GOLD		
A0=0.8u"	B0=0.8u"	
...	...	
A9=30u"	B9=30u"	

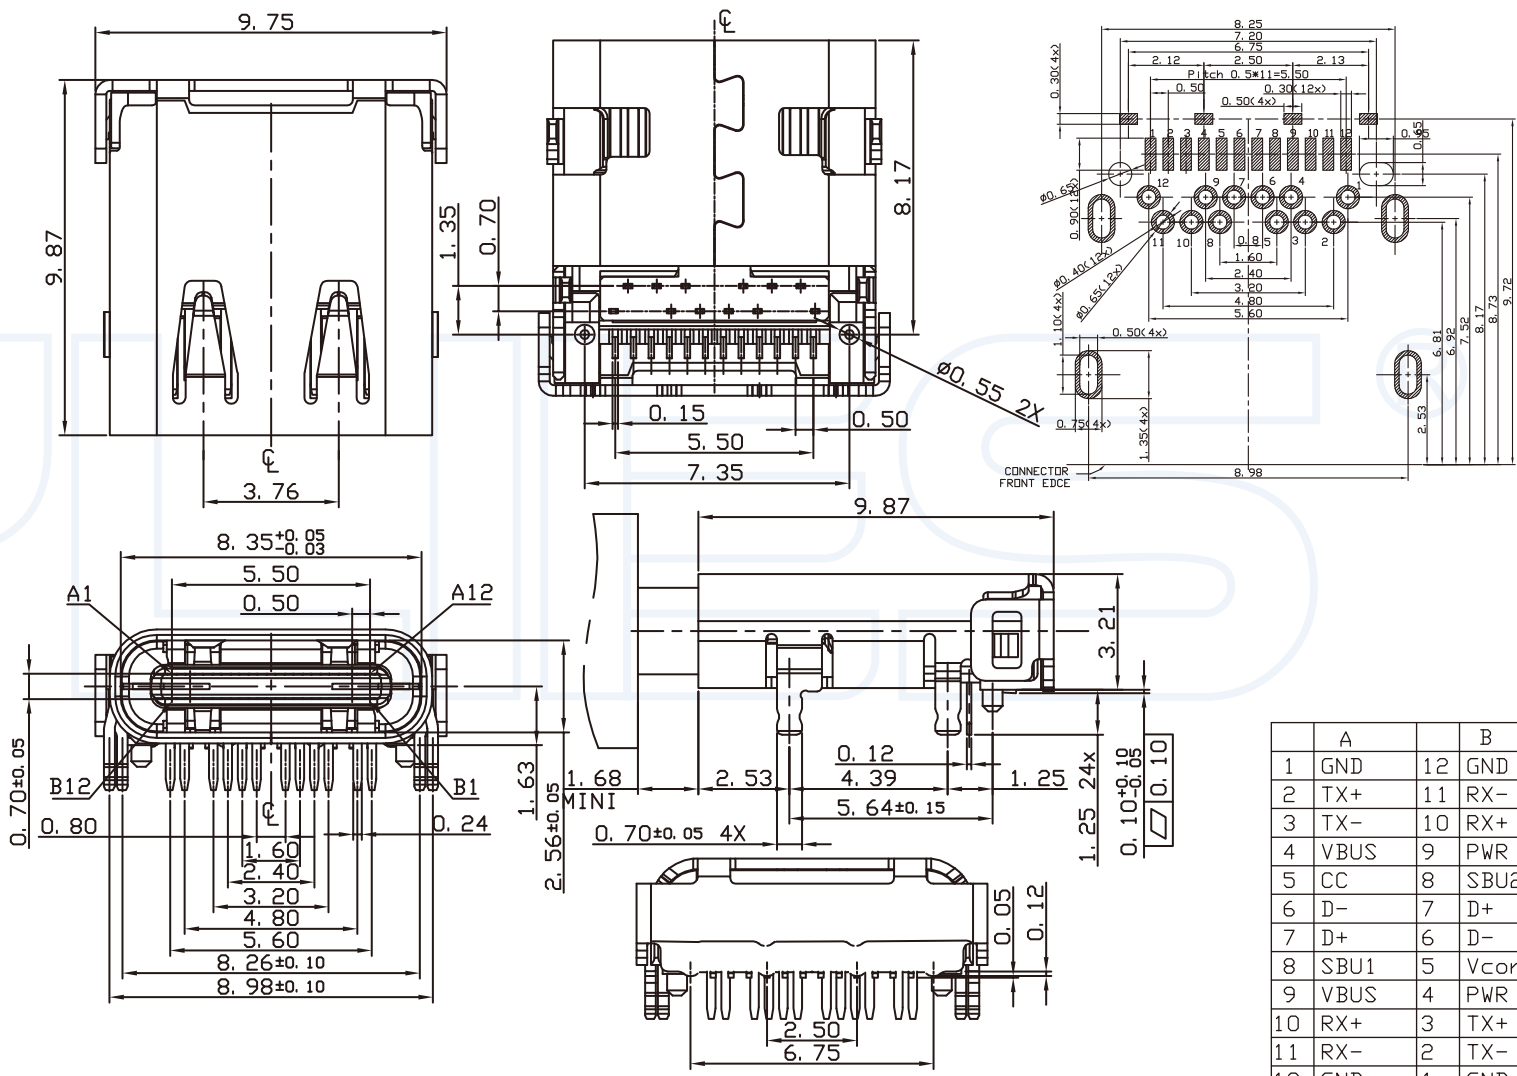

	A		B
1	GND	12	GND
2	TX+	11	RX-
3	TX-	10	RX+
4	VBUS	9	PWR
5	CC	8	SBU2
6	D-	7	D+
7	D+	6	D-
8	SBU1	5	Vconn
9	VBUS	4	PWR
10	RX+	3	TX+
11	RX-	2	TX-
12	GND	1	GND

**YLIES** 东莞市瑞翔精密连接器有限公司  
DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD

Tel:0769-85381995 / Fax:0769-85493987 / Email: ylies@ylies.cn / Web:www.ylies.cn

TITLE 512-MICRO USB 3.1 母座贴片DIP+SMT C-TYPE

DATE 2018-02-18

PROJECTON REV A UNIT mm SCALE 1:1 PAGE 1/1

PART NO:

U-2FMB0EBB

DRAWING NO: