

ANGLE	± 5°	REV	LOCAS	DESCRIPTION	DESIGN	DATE	卫国峰
X.XXX	± 0.05	01			DRAWN	DATE	尚伟
X.XX	± 0.15	02			CHECKED	DATE	吴汉学
X.X	± 0.25	03			AUDITED	DATE	龚劲松
X	± 0.50	04			APPROVED	DATE	eric

**Specifications/备注 (Remark)**

**1-材料 (MATERIAL)**

胶芯: PPS UL94V-0  
Housing: PPS UL94V-0  
端子: 黄铜

Contact: Copper Alloy C2680  
铁壳: Shell: SUS304




**2-特性 (characteristics):**

额定电流: 3.0 AMP.  
Raring Current: 3.0 AMP.  
接触阻抗: ≤20mΩ MAX.  
Contact Resistance: ≤20mΩ MAX.  
绝缘阻抗: ≥1000MΩMIN.  
Insulating Resistance: ≥1000MΩMIN.  
耐电压: 1000V AC/MINUTE  
Withstanding Voltage: 1000V AC/MINUTE  
温度范围: -40度至+105度  
Temperture Range: -40°Cto +105°C

**ORDERING INFORMATION**

**PL-XX S B0 P X B**

PLCC	NO.OF PER PIN	CONTACT SHAPE	INSULATOR MATERIAL	PACKING
	20=20PIN	S:STRAIGHT	A:PBT	A:PE Bag
	... ..	M:SMT	B:PA6T	... ..
			P:PPS	C:TRAY
			B:BLACK	D:BOX
	CONTACT PLATING			
	FULL OF GOLD			
	A0=0.8u"	B0=0.8u"		
	... ..	... ..		
	A9=30u"	B9=30u"		

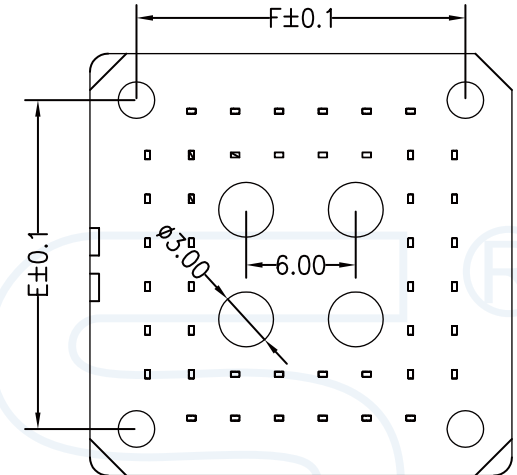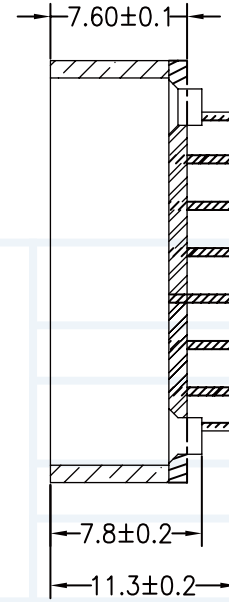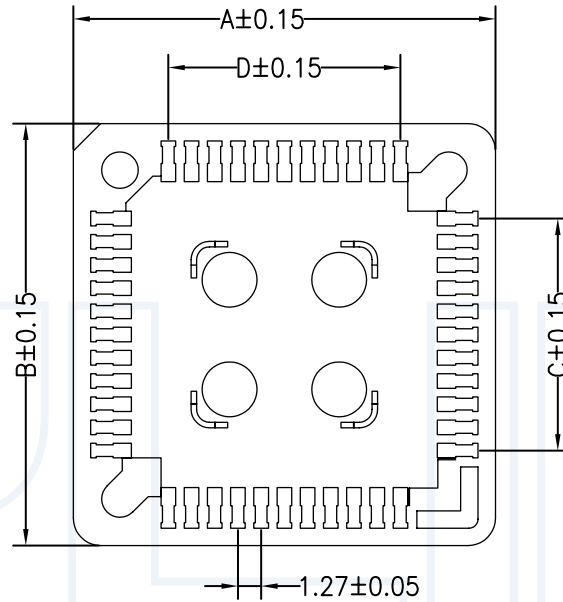

Pin No.	A	B	C	D	E	F
20	15.6	15.6	5.08	5.08	10.0	10.0
28	18.09	18.09	7.62	7.62	12.90	12.90
32	18.04	20.60	7.62	10.16	15.40	12.90
44	23.10	23.10	12.70	12.70	18.00	18.00
52	25.70	25.70	15.24	15.24	20.50	20.50
68	30.80	30.80	20.32	20.32	25.75	25.75
84	35.95	35.95	25.40	25.40	30.90	30.90

**YLIES** 东莞市瑞翔精密连接器有限公司  
DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD

Tel:0769-85381995 / Fax:0769-85493987 / Email: ylies@ylies.cn / Web:www.ylies.cn


TITLE

515-PLCC 180度

DATE

2018-02-18

PROJECTON



REV A

UNIT mm

SCALE 1:1

PAGE 1/1

PART NO:

PL-XXSB0PAB

DRAWING NO: