

Contact length L:
6.6mm, 9.4mm, 12.9mm, 16.0mm

Specifications/备注 (Remark)

Insulator:Black glass filled polyester
PPS-GF30-FR
Fiammability:UL94V-0
Sleeve:Brass CuZn 36Pb3(36000)
Contact clip(4 finger):Beryllium copper(C17200)
Mating pin:Ø0.40 to 0.56mm
Forces:(polished steel gauge Ø0.43mm)
Insertion:2.0 N typ
Withdrawal:1.0 N typ
Mechanical life:min 500 cycles
Rated current:3.0Amp
Contact resistance:Max 10mΩ
Dielectric resistance:Min 1000V RMS

ORDERING INFORMATION

R2630-2 XX X XG S XXX C 3

HEIGHT OF HOUSING:
30:3.0mm


NO.OF ARRAY PITCH
0:NO PITCH
4:7.62mm
5:10.16mm
6:15.24mm
7:22.86mm

NO.OF PINS PER ROW:
06-64P

LENGTH OF TERMINAL
115:11.5mm
143:14.3mm
178:17.8mm

CONTACT PLATING
A=1U"
B=2U"
.....
E=15U"
F=30U"
S=ORDINARY TIN PLATED
H=HALF GOLD PLATED TIN

ANGLE	± 5°	REV	LOCAS	DESCRIPTION	DESIGN	DATE	卫国峰
X.XXX	± 0.05	01			DRAWN	DATE	尚伟
X.XX	± 0.15	02			CHECKED	DATE	吴汉学
X.X	± 0.25	03			AUDITED	DATE	龚劲松
X	± 0.50	04			APPROVED	DATE	eric

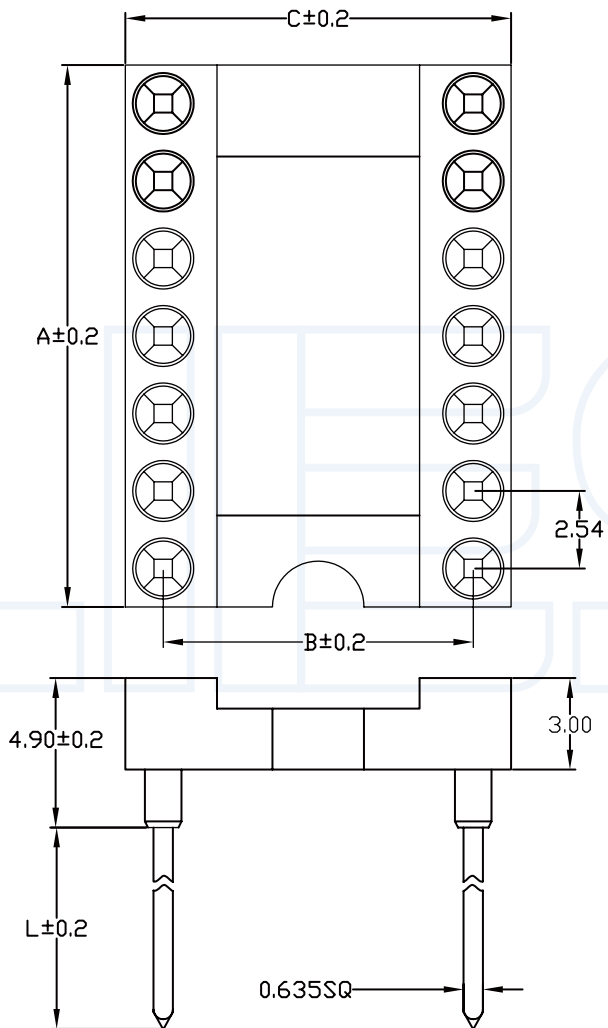

See page 33	No.of Positions	A	B	C
fig. 1	6	7.6	7.62	10.1
fig. 2	8	10.1	7.62	10.1
fig. 3	10	12.6	7.62	10.1
fig. 4	12	15.2	7.62	10.1
fig. 5	14	17.7	7.62	10.1
fig. 6	16	20.3	7.62	10.1
fig. 7	18	22.8	7.62	10.1
fig. 8	20	25.3	7.62	10.1
fig. 9	22	27.8	7.62	10.1
fig. 10	24	30.4	7.62	10.1
fig. 11	28	35.5	7.62	10.1
fig. 12	20	25.4	10.16	12.6
fig. 13	22	27.8	10.16	12.6
fig. 14	24	30.4	10.16	12.6
fig. 15	28	35.5	10.16	12.6
fig. 16	32	40.6	10.16	12.6
fig. 17	24	30.5	15.24	17.7
fig. 18	28	35.5	15.24	17.7
fig. 19	32	40.6	15.24	17.7
fig. 20	36	45.7	15.24	17.7
fig. 21	40	50.8	15.24	17.7
fig. 22	42	53.3	15.24	17.7
fig. 23	48	60.9	15.24	17.7
fig. 24	50	63.5	15.24	17.7
fig. 25	52	66.0	15.24	17.7
fig. 26	50	63.5	22.86	25.3
fig. 27	52	66.0	22.86	25.3
fig. 28	64	82.1	22.86	25.3

YLIES 东莞市瑞翔精密连接器有限公司
DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD

Tel:0769-85381995 / Fax:0769-85493987 / Email: ylies@ylies.cn / Web:www.ylies.cn


TITLE

288-2.54mm IC 圆孔排母 180度

DATE

2018-02-18

PROJECTON



REV

A

UNIT

mm

SCALE

1:1

PAGE

1/1

PART NO:

R2630-2XXXXXSXXXC3

DRAWING NO:

1

2

3

4

5

6

7

8

9