



ANGLE	± 5°	REV	LOCAS	DESCRIPTION	DESIGN	DATE	卫国峰
X.XXX	± 0.05	01			DRAWN	DATE	尚伟
X.XX	± 0.15	02			CHECKED	DATE	吴汉学
X.X	± 0.25	03			AUDITED	DATE	龚劲松
X	± 0.50	04			APPROVED	DATE	eric

### Specifications/备注 (Remark)

- 1-材料 (MATERIAL)  
 胶芯: LCP UL94V-0  
 Housing:LCP UL94V-0  
 端子: 磷青铜  
 Contact: Phosphor bronze
- 2-特性 (characteristics):  
 额定电压: 30V AC/DC .  
 Voltage Rating:30V AC/DC .  
 额定电流: 0.2 AMP AC/DC .  
 Raring Current:0.2 AMP AC/DC .  
 接触阻抗: 30mΩ MAX.  
 Contact Resistance:30mΩ MAX .  
 绝缘阻抗: 100MΩMIN.  
 Insulating Resistance:100MΩMIN.  
 耐压: 200V AC/MINUTE  
 Withstanding Voltage:200V AC/MINUTE  
 温度范围: -25度至+85度  
 Temperature Range: -25°Cto +85°C

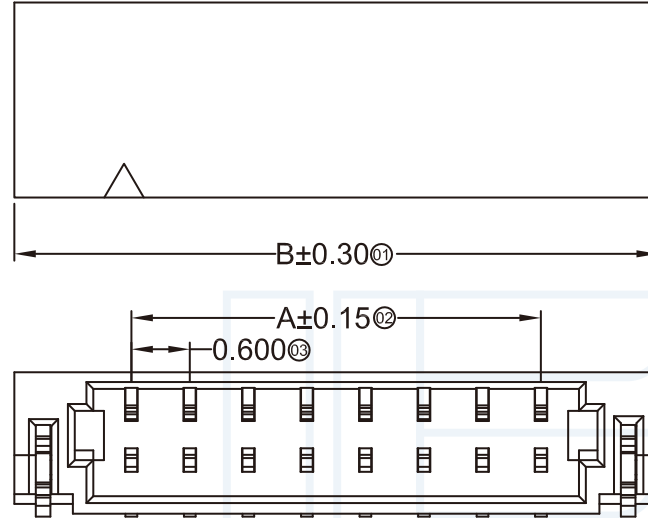

withstandiag voltage

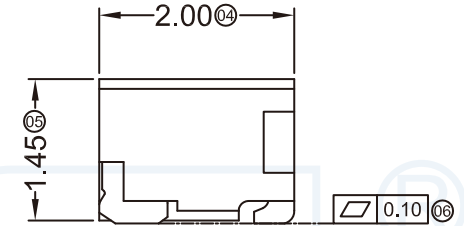


Recommended P.C.B Layout  
 General Tolerance±0.05

### ORDERING INFORMATION

**W06-XX XX X XX X**

- |                                 |  |  |
|---------------------------------|--|--|
| NO.OF PINS<br>Per Row<br>02-11P | INSULATOR<br>MATERIAL<br>A:PA46<br>B:PA66<br>C:PA9T<br>D:LCP                               | PACKING<br>A:PE Bag<br>B:TUBE<br>C:TRAY                |
| SERLES NO<br>06:0.6mm           | CONTACT PLATING<br>FULL OF GOLD SEMI-GOLD<br>A0=0.8u" B0=0.8U"<br>.....<br>A9=30u" B9=30U" | CONTACT SHAPE<br>LT:STRAIGHT SMT<br>WT:RIGHT ANGLE SME |
| S1=ORDINARY TIN PLATED          |  |  |
| S2=MATTE TIN PLATED             |  |  |
| S3=TIN-PLATED HIGH-TEMPERATURE  |  |  |

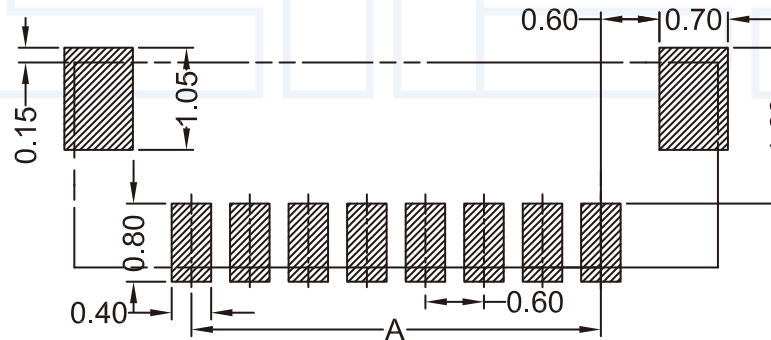

Poles	Dimensions(mm)		Poles	Dimensions(mm)	
	A	B		A	B
02	0.60	3.00	12	6.60	9.00
03	1.20	3.60	13	7.20	9.60
04	1.80	4.20	14	7.80	10.20
05	2.40	4.80	15	8.40	10.80
06	3.00	5.40	16	9.00	11.40
07	3.60	6.00	17	9.60	12.00
08	4.20	6.60	18	10.20	12.60
09	4.80	7.20	19	10.80	13.20
10	5.40	7.80	20	11.40	13.80
11	6.00	8.40	22	12.60	14.40

0600WRS-XXHF-LPV01	LCP UL 94V-0 (Halogen Free)	Phosphor Bronze	Gold-Flash	Brass	Gold-Flash	0600H
PART NO	Material	Material(Pin)	Finish(Pin)	Material (Solder Tabs)	Finish (Solder Tabs)	Mates With SWB Housing

**YLIES** 东莞市瑞翔精密连接器有限公司  
 DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD

Tel:0769-85381995 / Fax:0769-85493987 / Email: ylies@ylies.cn / Web:www.ylies.cn


TITLE

323-0.6mm WAFER 插针 卧贴

DATE

2018-02-18

PROJECTON



REV

UNIT

SCALE

PAGE

PART NO:

W060-08S1DWTC

DRAWING NO: