

F

E

D

C

B

A

F

E

D

C

B



A

123456789

ANGLE	± 5°	REV	LOCAS	DESCRIPTION	DESIGN	DATE	卫国防
X.XXX	± 0.05	01			DRAWN	DATE	尚伟
X.XX	± 0.15	02			CHECKED	DATE	吴汉学
X.X	± 0.25	03			AUDITED	DATE	龚劲松
X	± 0.50	04			APPROVED	DATE	eric

NOTES:

- 1.HUOSING: LCP HIGH-TEMP THERMOPLASTIC UL94V-0 COLOR:BEIGE
- 2.TERMINAL:PHOSPHOR BRONZE  
PLATING:1μ" GOLD FLASH OVERALL 50~100μ" NICKEL UNDER PLATED.
- 3.VOLTAGE:100VAC
- 4.CURRENT RATING: 0.5 A
- 5.INSULATION RESISTANCE: 500MΩ
- 6.DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC
- 7.CONNECTOR MATING FORCE:90GF MAX.
- 8.TEMPERATURE RATING:-40℃ TO +125℃

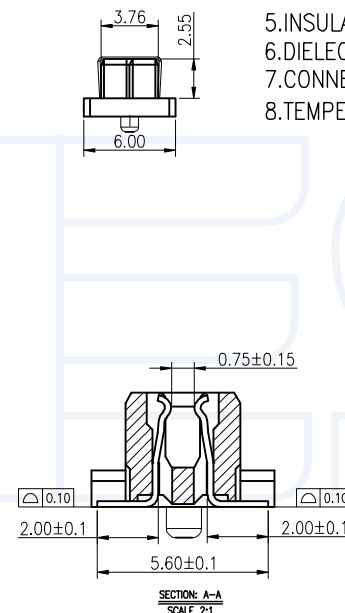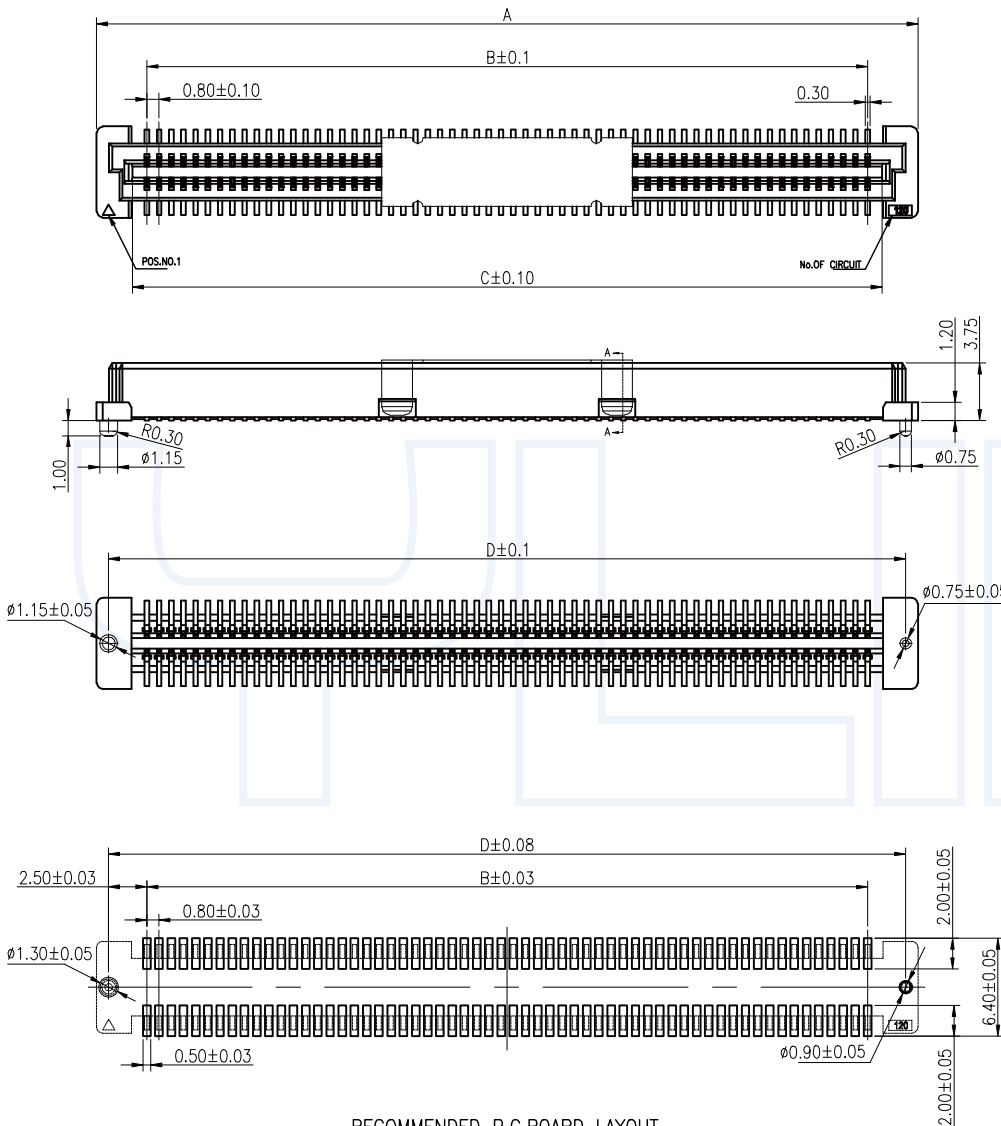

No.of Contacts	Dimensions			
	A	B	C	D
40	21.80	15.20	16.80	20.20
50	25.80	19.20	20.80	24.20
60	29.80	23.20	24.80	28.20
80	37.80	31.20	32.80	36.20
100	45.80	39.20	40.80	44.20
120	53.80	47.20	48.80	52.20
140	61.80	55.20	56.80	60.20
160	69.80	63.20	64.80	68.20
180	77.80	71.20	72.80	76.20
200	85.80	79.20	80.80	84.20



**YLIES** 东莞市瑞翔精密连接器有限公司  
DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD

Tel:0769-85381995 / Fax:0769-85493987 / Email: ylies@ylies-china.com / Web:www.ylies-china.com

PROJECTON	REV	UNIT	SCALE	PAGE
	A	mm	1:1	1/1

TITLE 0.8mm PITCH BTB CONNECTOR RECEPTACLE ASSEMBLY 5.0H TYPE

DATE 2020-04-18

PART NO:

DRAWING NO:

123456789